

Heat and UV light stabilizer for coatings

1. General


Chiguard® 3253 is a synergistic blend of stabilizers specifically designed for coatings. It provides outstanding performance for a wide variety of clear and pigmented coating systems. It is suitable for both water-borne and solvent-borne applications. Its superior effectiveness is particularly pronounced in improved thermal stability, good color maintenance and long-term thermal and UV light stabilization.

2. Properties


Chemical name : A blend of Chiguard 5530 and Chiguard 353

Structure :


a.

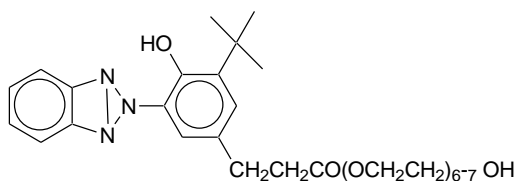


b.

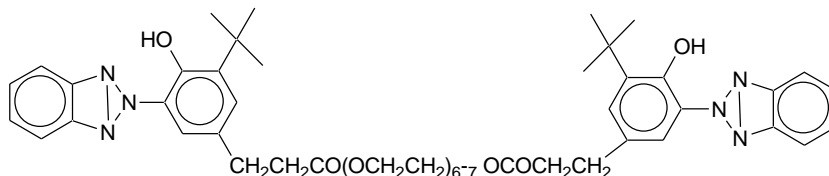

c.

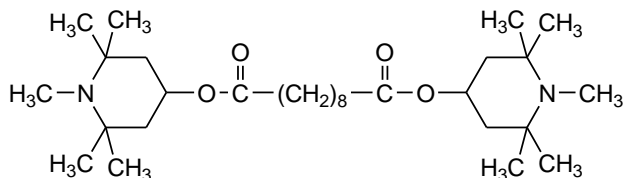

d.

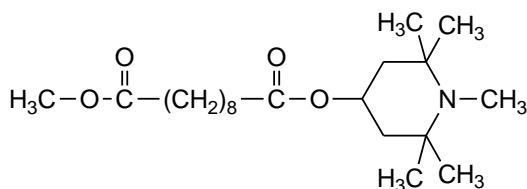

CAS No. :
a. 104810-48-2
b. 104810-47-1
c. 41556-26-7
d. 82919-37-7

Heat and UV light stabilizer for coatings

3. Physical Data

Appearance	:	Pale yellow liquid
Odor	:	Odorless
Boiling point	:	N/A
Specific gravity	:	1.11 (25 °C, g/mL)
Viscosity (cps)	:	960 @25 °
Color (Gardner)	:	4.1
Vapor pressure	:	< 1 mmHg (20 °C)

4. Solubility

(g in 100 ml solvent @20°C)

Butanol	:	>50
Butyl acetate	:	>50
Ethyl glycol	:	>50
MEK	:	>50
Styrene	:	>50
TMPTA	:	>50
Water	:	<0.5

5. Specification


Appearance	:	Pale yellow liquid
Specific gravity	:	1.09~1.13 (25 °C, g/mL)
Viscosity	:	1200 max. (25 °C, cps)
Volatile	:	0.5% max.
Clarity of solution	:	Clear
Color (Gardner)	:	6.0 max.
Transmittance	:	
@460 nm	:	95 min.
@500 nm	:	97 min.

6. Suggested Application

Chiguard® 3253 is especially recommended for the clear and light pigmented applications such as wood coatings, PUR systems, UPES/Styrene gel coats, UV radiation curing systems based on acrylics and UPES. The use levels of Chiguard® 3253 range between 0.5% and 4% are recommended for protection. It depends on the substrate and performance requirements of the final application.

Heat and UV light stabilizer for coatings

7. UV Spectrum

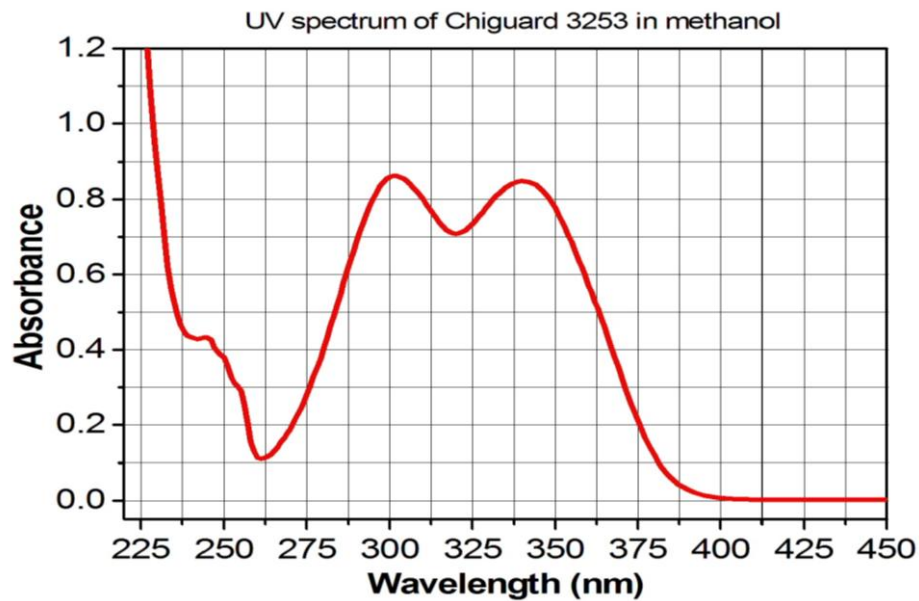

8. Packaging

30 kg plastic drum / 200 kg steel drum