


# DISPARLON<sup>®</sup> P-465,466,467

Silicone-Free, universal defoamers for versatile use

Product	Composition	Function	Active (%)	Solvent
P-465	Vinyl Polymer (Silicone&PFAS Free)	Defoaming	40%	Iso-paraffin
P-466			40%	Iso-paraffin
P-467			80%	Iso-paraffin

Coating Systems	P-465	P-466	P-467
Solvent Free Epoxy			
Polyurethane			
Alkyd			
Polyaspartic			

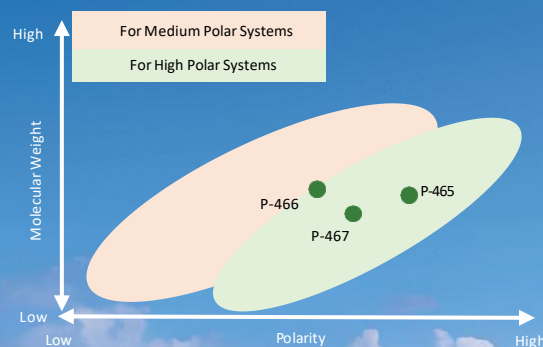


## Characteristics and Advantages


- Excellent Initial Defoaming and Persistency
- Silicone/PFAS-Free, but same level of defoaming as challenging Silicone/PFAS defoamer
- Engineered molecular weight and polarity to deliver performance across various resin systems, such as Epoxy, Fast-curing Epoxy, Polyaspartic, Alkyd, 2KPU etc..

## Epoxy Flooring Formulation


A : Excellent – E : Worst    ● Defoaming    ● Leveling

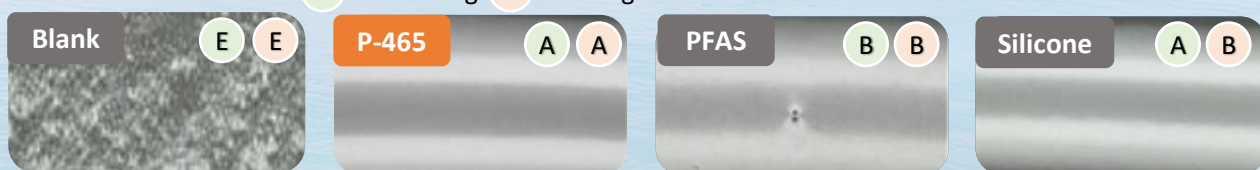

## 2K Alkyd Formulation

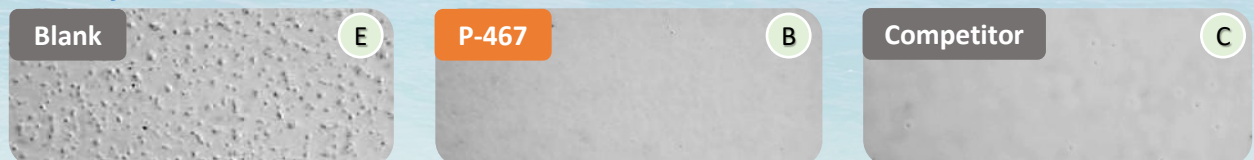

## Polyaspartic Formulation

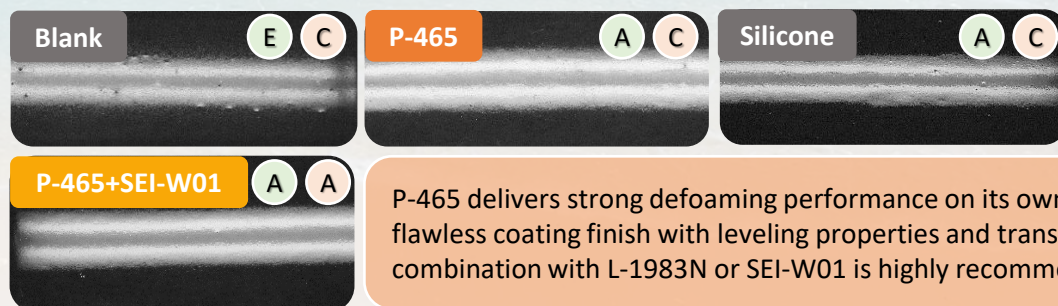

P-465 delivers strong defoaming performance on its own, but for a flawless coating finish with leveling properties and transparency, combination with L-1983N or SEI-W01 is highly recommended